

AREA

automatic packaging systems



PACKAGING SPEAKS AREA

R9

Horizontal stretch wrapping machine. Easy to use, simple and strong. The manual wrapping cycle allows to wrap the product according to your needs.

TECHNICAL FEATURES

- Clamp and cutting unit
- Mechanical pressure unit
- Start/stop cycle by foot pedal
- Power supply 230V-50Hz-1P
- OP panel
- Pneumatic power: 6 Bar.
- Ring powered by friction wheel
- Inside bobbin diameter mm. 76
- Film height : 125 or 250 mm (according to the ring diameter)

PARAMETERS ADJUSTABLE FROM THE OP PANEL

- Rotation speed
- Power ON/OFF
- Coil changing

OPTIONAL

- Inlet/Outlet free roll conveyors
- Inlet/Outlet pressure units
- Double bobbin



R9

Horizontal automatic stretch wrapping machine. Simple and strong, suitable for long products.

TECHNICAL FEATURES

- Clamp and cutting unit
- Start/stop cycle by photocell
- Adjustable standby from the panel (the machine stops after few minutes)
- Power supply 230V-50Hz-1P
- OP panel
- Pneumatic power: 6 Bar.
- Ring powered by friction wheel
- Inside bobbin diameter mm. 76
- Film height : 125 or 250 mm (according to the ring diameter)

OPTIONAL

- Powered conveyors with galvanized or vulcanized rolls
- Side guides with manual or automatic adjustment
- Welding machine



R9_a

Horizontal automatic stretch wrapping machine created to send spare parts without using any filling material, just with carton and few grams of stretch film.

It can be used with heavy and/or light products.

Control panel with PLC and Touch Screen with the possibility to save up to 200 wrapping cycles.

Self-adjusting side guides with powered rolls for product feeding and holding during the wrapping cycle.

- Packaging volume reduction.
- Transport weight reduction
- Product securely wrapped

TECHNICAL FEATURES

- Clamp and cutting unit
- Inlet/Outlet self-adjusting side guides with powered rolls
- Start/stop cycle by photocell
- Adjustable standby from the panel (the machine stops after few minutes)
- Power supply 230V-50Hz-1P
- Pneumatic power: 6 Bar.
- Ring powered by friction wheel
- Inside bobbin diameter mm. 76



R9_{ac}

Control Panel

Simple and intuitive, allows you to change the parameters quickly. Specifically made for setting different wrapping cycles. Designed for setting up different wrapping cycles.





Horizontal semi-automatic machine for wrapping tyres with stretch film.



R9_T

Ring Size Scheme.

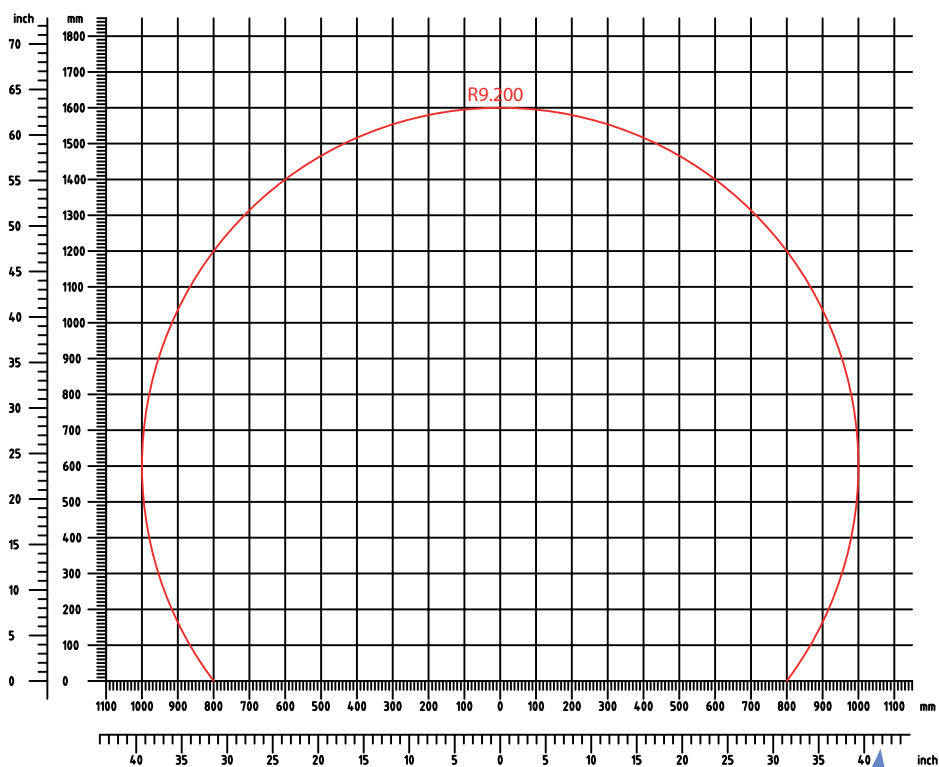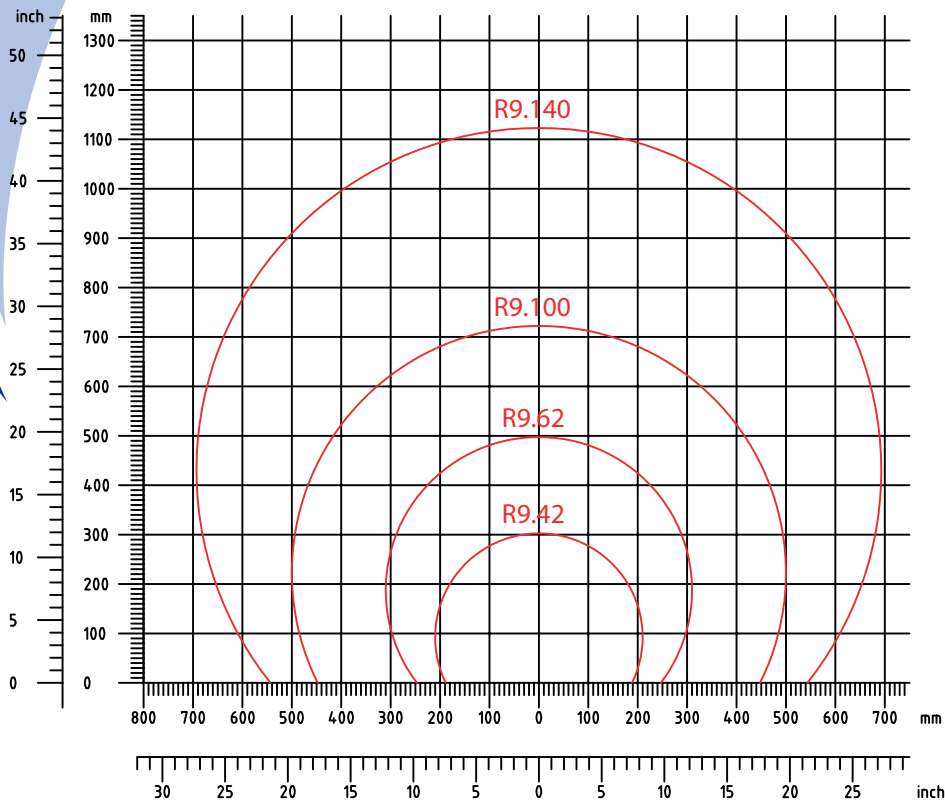

TECHNICAL FEATURES R9-R9A-R9AC-R9T

R9 42
 Ring diameter:
 420 mm
 RPM max 120
 Film height:
 125 mm

R9 62
 Ring diameter:
 620 mm
 RPM max 100
 Film height:
 125 mm

R9 100
 Ring diameter:
 1000 mm
 RPM max 70
 Film height:
 125 mm

R9 140
 Ring diameter:
 1400 mm
 RPM max 50
 Film height:
 125 or 250 mm

R9 200
 Ring diameter:
 2000 mm
 RPM max 30
 Film height:
 125 or 250 mm



Via Papa Giovanni XXIII, 18/20 - 20053 Rodano-Millepini
 (MILANO) - ITALY
 Tel. +39 02 95327281 - Fax +39 02 95327297
www.areapackaging.com
sales@areapackaging.com

R9